Blinds by Post

Roman Blinds
Installation & Operation Instructions

FITTING INSTRUCTIONS 1/2

You should have:

- Roman blind (fully assembled)
- Fixing brackets (quantity to suit the length of a blind)
- P-Clip
- Screws for wood/PVC

YOU WILL NEED

- Screwdriver
- Pencil
- Drill
- Tape measure
- Step ladder

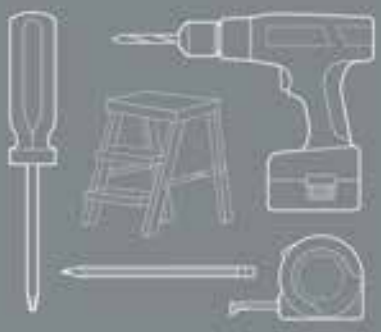

WARNING:
PLEASE TAKE CARE WHEN UNPACKING YOUR BLIND, DO NOT USE A KNIFE OR ANY SHARP OBJECTS.

The installation of this product should be conducted by someone competent in DIY.

STEP 1 - FITTING THE BRACKETS

Choose how to mount the brackets. The brackets are a universal type that can be used to top fix or face fix.

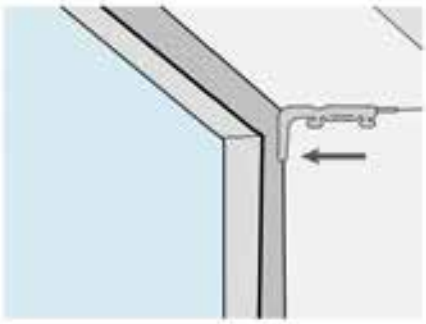

Face Mount
Face mount onto a wall/ window frame

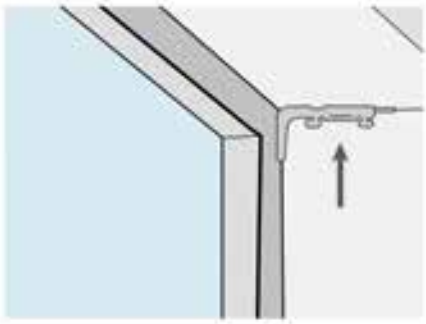

Face Mount
Face mount onto a wall/ window frame

Deciding Where To Mount The Brackets
Ensure that brackets are positioned a suitable distance away from any window/ door handles or any other obstructions to allow the blind to operate smoothly.

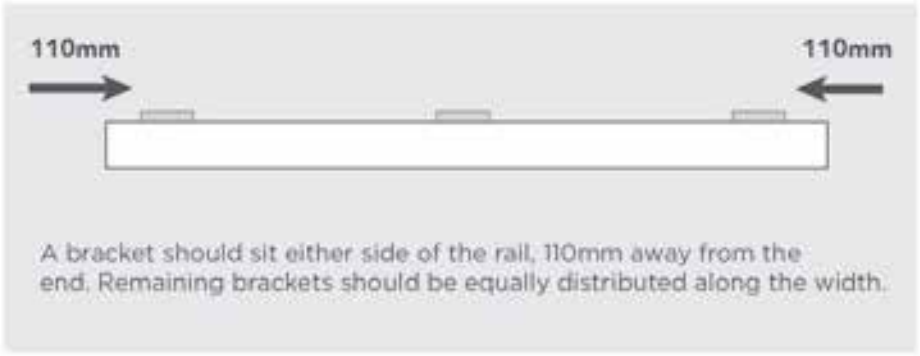

Hold each bracket into place and mark the hole positions using a pencil. Fit each bracket using 2 screws provided. If a pilot hole is required, use a 2.5mm drill bit. Ensure the brackets are level to ensure the smooth operation of the blind.

For fixing to alternative surfaces i.e. plaster/ concrete, alternative suitable fixings should be used.

FITTING INSTRUCTIONS 2/2

STEP 2 - FITTING THE BLIND

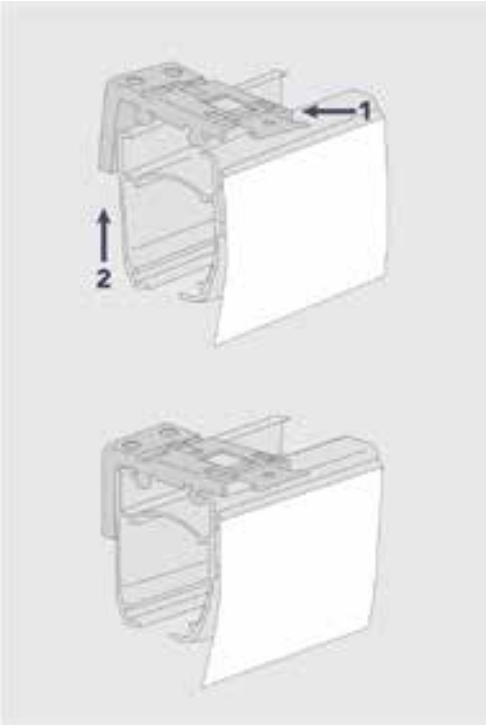

We supply the headrail with a blind already attached to it.

When the brackets have been fitted to the window area, holding the blind up, rest the front ridge of the rail onto the front lip of the bracket.

Lift the back of the rail to meet the bracket, push centre of the spring so that it clicks into place securely and release.

STEP 3 - FITTING CHILD SAFETY CLIP

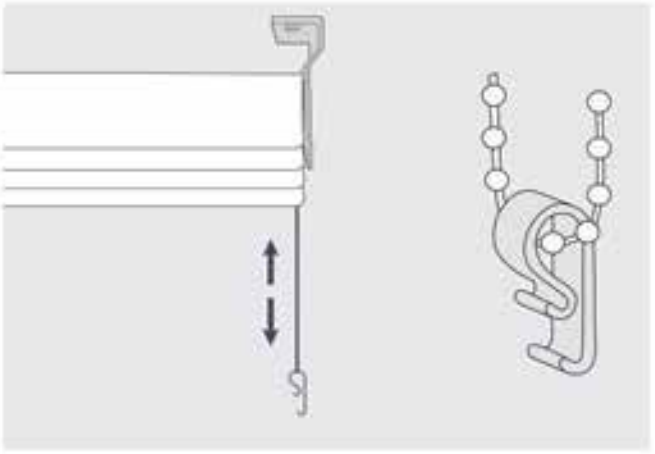

The child safety device (p-clip) must be installed at maximum distance possible from the control mechanism to prevent the looped cord/ chain from becoming slack.

1. Ensure the control chain is inside the P-clip.

2. Ensure the chain is taut and that the P-clip is at the bottom of the loop and that the chains can manoeuvre properly.

3. Screw the P-Clip to a wall adjacent to the blind ensuring that the chain remains taut. The chain will be held permanently taut and under constant tension.

Your blind is now ready to operate.

STEP 4 - TO OPERATE THE BLIND

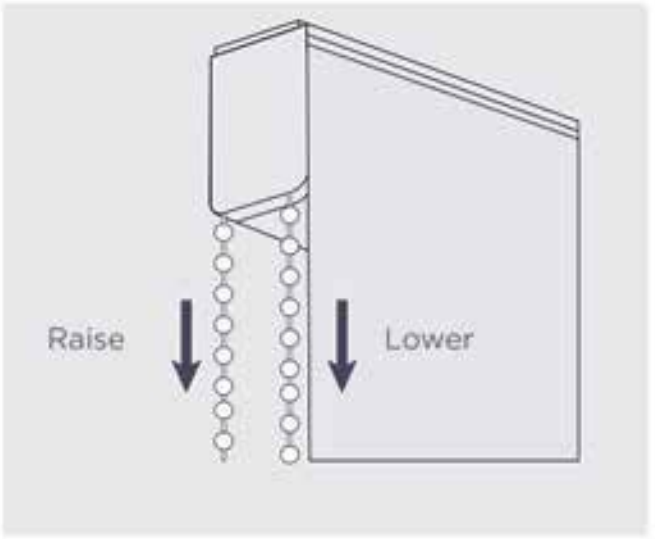

Gently pull the chain to raise and lower your blind.

ADVICE & CARE

EXPERT ADVICE



If you pull the cord to open or close the blind but the blind doesn't move, then take the blind down and look inside the headrail to make sure that the metal tilt rod is fully engaged with the sidewinder mechanism. This rod should rotate when the side chain is pulled. If it doesn't, take off the headrail end cap located at the opposite end of the rail to the chain mechanism and push the metal rod until it's fully engaged with the sidewinder mechanism. The chain should now rotate the rod.

CARING FOR YOUR BLIND

- Don't allow moisture to settle on the blinds.
- Wipe with a clean damp cloth.
- Vacuum your roman blind using the vacuum upholstery attachment.
- Don't use any type of detergent to clean your blind.
- Don't oil or lubricate any part of the blind to prevent damage.
- Dry cleaning recommended.



WARNING

Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.

To avoid strangulation and entanglement, keep cords out of the reach of young children.

Cords may become wrapped around a child's neck.

- Move beds, cots and furniture away from window covering cords.
- Do not tie cords together.
- Make sure cords do not twist and create a loop.

child safe

make it safe™

BBSA
BRITISH BLIND & SHUTTER ASSOCIATION