Blinds by Post

TwistFit Pleated Blinds
Installation & Operation Instructions

FITTING INSTRUCTIONS 1/3

You should have:

Blind Parts:



TwistFit Pleated Blind



Cover cap x1



Cover plate x1



Tightening spanner x1



Handles

Before you begin installation, make sure the wall surface is a flat, secure and solid surface. If the recess moves or flexes when pressure is applied, such as plasterboard with no support behind it, it will not be suitable for our TwistFit Pleated Blind system.

STEP 1

Start by placing the cover plate on the end of the plunger.

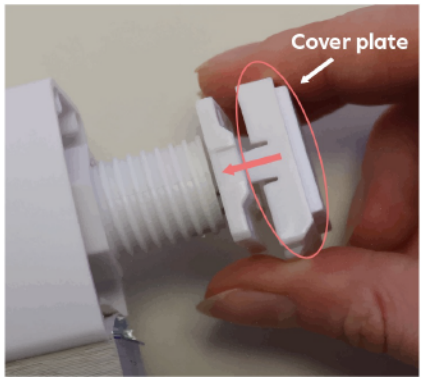

STEP 2

Slide the plastic cover cap onto the headrail of your blind, and keep the plunger end exposed.

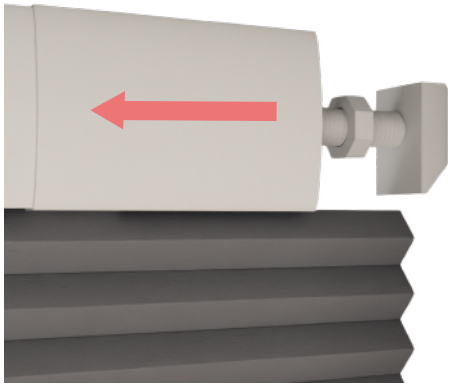

FITTING INSTRUCTIONS 2/3

STEP 3

Place the plunger end of the blind into the recess. Push against the plunger to compress it, then gently slide the other end of the blind into place.



STEP 4

Position your blind in the desired position within your recess (making sure it is level). Ensure the blind is far enough away from any obstructions, such as window handles, before tightening the blind in place, keeping hold of the blind.

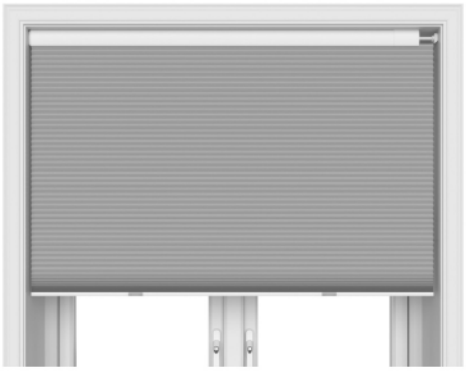

STEP 5

Tensioning Instructions

Holding the blind securely in place and:

1. With your tightening spanner place it onto the bolt.
2. Turn your bolt **away from you** until your blind is secure, by turning the bolt.

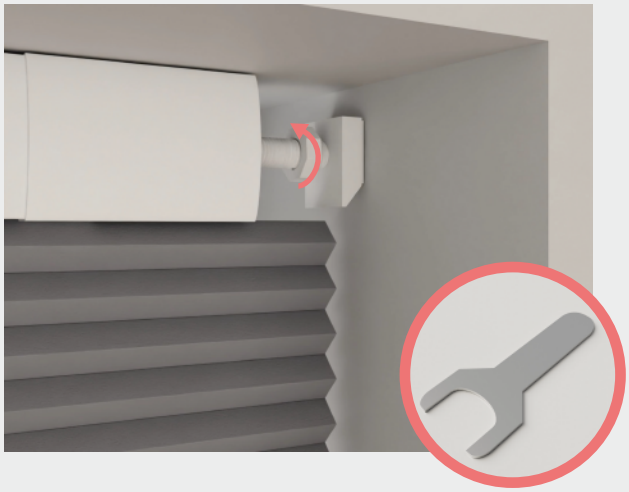

FITTING INSTRUCTIONS 3/3

STEP 6

Once securely in place hide the plunger end by sliding the cover cap across.

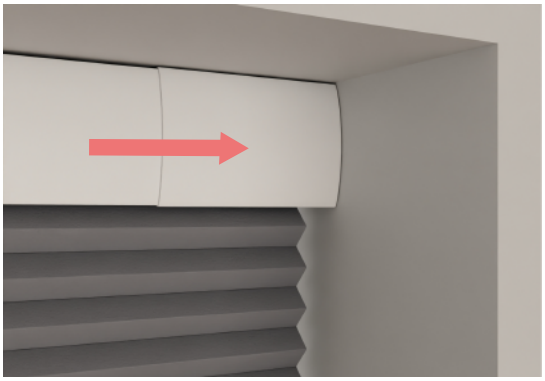

STEP 7

Clip the plastic handle(s) on the bottom bar where you would like them to be.

Please ensure you place the handle in the exact position you require it to be.

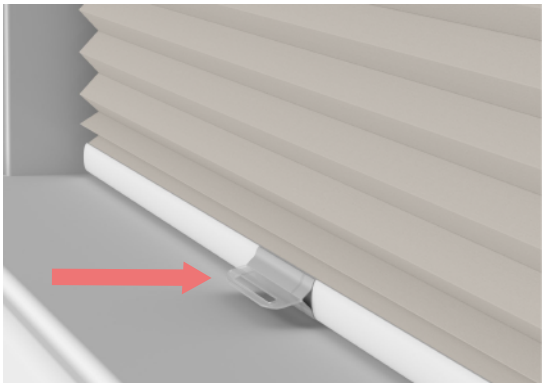

STEP 8

Once the blind is installed, you may need to stretch the fabric if you want the bottom bar to rest on the windowsill. To do this, pull the fabric down beyond the recess, and then place onto the windowsill.

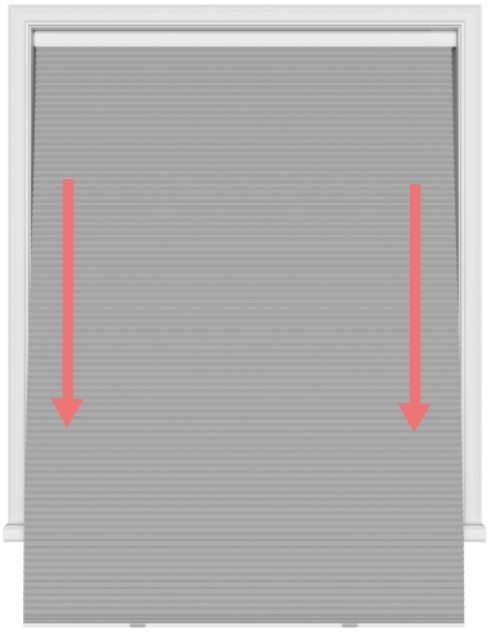

REMOVING YOUR BLIND

Keeping hold of your blind, place the spanner onto the bolt and turn it towards you to release the blind. Once it's loose enough, push it toward the plunger end and gently ease the blind out of the recess.

MAINTENANCE

The product is maintenance free however we recommend that regular visual checks are completed to ensure that no components have been damaged, which could result in operating difficulties and/or cause a safety risk. Ensure the blind is always secure and retension with the spanner tool if necessary. If any maintenance is required we recommend that the work is carried out immediately, by a reputable blind company.

WARNING

Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.

To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck. Move beds, cots and furniture away from window covering cords.

Do not tie cords together. Make sure cords do not twist and create a loop.



child safe

make it safe™

BBSA

BRITISH BLIND & SHUTTER ASSOCIATION